



PRODUCT CATALOG



www.legendattachments.com

1090 Legion Road
Detroit Lakes, MN 56501
218.844.5378
Fax 218.844.5379
info@legendattachments.com

Tim Lake, Sales
tlake@legendattachments.com

SECTION A
GRAPPLES



EXTREME GRAPPLE



ROOT GRAPPLE



STANDARD ROCK GRAPPLE



HEAVY DUTY ROCK GRAPPLE



HD LOW PRO BUCKET W/GRAPPLE



4 IN 1 COMBINATION BUCKET



UTILITY GRAPPLE



COMPACT TRACTOR BRUSH GRAPPLE



BALE GRAPPLE



ROUND TINE GRAPPLE



STUMP GRAPPLE



STD MANURE GRAPPLE



GRAPPLE RAKE



DUAL ARM GRAPPLE RAKE



HD SCRAP GRAPPLE

SECTION B

BRUSH CUTTERS



ROTARY BRUSH CUTTER-STD FLOW



ROTARY BRUSH CUTTER-GEAR BOX



ROTARY BRUSH CUTTER-HIGH FLOW



OPEN FRONT BRUSH CUTTER STD FLOW



OPEN FRONT BRUSH CUTTER GEAR BOX



OPEN FRONT BRUSH CUTTER HIGH FLOW



SECTION C

TREE CUTTER



TREE CUTTER

SECTION D

BUCKETS



HEAVY DUTY ROCK BUCKET / SKELETON



HEAVY DUTY ROCK BUCKET 5" SPACING



STANDARD ROCK BUCKET/SKELETON



UTILITY ROCK BUCKET/SKELETON



HEAVY DUTY LOW PROFILE BUCKET



TOOTH BUCKET



UTILITY BUCKET



STUMP BUCKET




SIFTER BUCKET

SECTION E LANDSCAPING




ROCK DIGGER



ROCK/STUMP DIGGER



TREE SPADE



TREE PULLER



LOG SPLITTER



LAND PLANE



SECTION F
PALLET FORKS



STANDARD DUTY WALK THRU PALLET FORKS



HEAVY DUTY PALLET FORKS



HEAVY DUTY WALK THRU PALLET FORKS



CLAMP ON PALLET FORKS

SECTION G
SNOW



SNOW BLOWER



SNOW BUCKET



SCREEN SNOW BUCKET



SNOW PUSHER


SECTION H
HAY HANDLING




SNOW PUSHER ACCESSORIES



RECEIVER STYLE BALE SPEAR




SINGLE BALE SPEAR (ECONO)



SINGLE BALE SPEAR



DOUBLE BALE SPEAR



TRIPLE BALE SPEAR



DOUBLE ROUND BALE SPEAR



BALE ACCUMULATOR GRAPPLE



6 PACK BALE ACCUMULATOR GRAPPLE

SECTION I
3 POINT



3 POINT TRAILER HITCH



SLIDER DITCHER BLADE



SECTION J

MINI SKID
STEER



TORO DINGO
BUCKET

SECTION K


MOUNTING
PLATES &
ADAPTERS




MOUNTING PLATES



MISC. MOUNTING
PLATES



3 POINT ADAPTER



UNIVERSAL QUICK
ATTACH ADAPTER

SECTION L

ACCESSORIES



RECEIVER PLATE
& ACCESSORIES



BOLT ON CUTTING
EDGE




BOLT ON TOOTH
BAR



Extreme Grapple

- 45" 2 Tine Model #33103
- 45" 4 Tine Model #33077
- 58" 9 Tine Model #33076
- 72" 11 Tine Model #33071

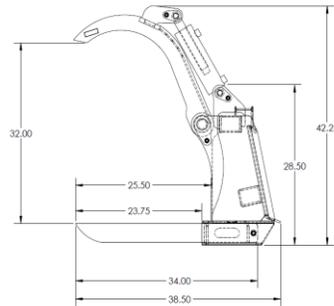


- Excellent for digging out & moving stumps & rocks
- Tines can be flipped for brush & manure work
- Hoses & Couplers included

Specifications	
Overall Width	45", 45", 58¼", 71½"
Overall Height - Closed	28-3/4"
Overall Height - Open	42-1/2"
Overall Depth	39"
Grapple Opening	34"
Depth Of Bucket	26"
Tines	1-1/4" T-1 Steel – Replaceable
Bucket Thickness	3/4" & 1/2" Grade 50 Frame Work Laser Cut
Bottom Plate	1/2" Grade 50
Grapple Arms	1" Grade 50 - Laser Cut
Cylinders	3" Bore
Hydraulic Couplers	Flat Face
Hydraulic Hoses	1/2"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Main Pin	2" x 20"
Rear Cylinder Pin	1" x 6"
Front Cylinder Pin	1" x 5.5"
Weight	45" = 685 lbs, 45" 4 Tine = 798 lbs, 58" = 1389 lbs, 72" = 1525 lbs

Root Grapple

73" Model 33081

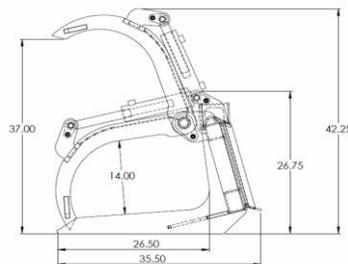

- For the most powerful skid steers with the toughest of jobs
- Move large loads with ease
- Closes tighter than most other Grapples
- Clears large logs, rocks, brush and demolition materials

Specifications	
Width	73"
Overall Height - Closed	28"
Overall Height - Open	43"
Overall Depth	36"
Grapple Opening	36"
Bucket Depth	27"
Tines	1" T-1 High Strength Steel
Top Tube	3" x 3" x 1/4"
Bottom Tube	3" x 4" x 1/4"
Grapple Arms	3/4" Grade 50 - Laser Cut
Cylinders	2½" Bore
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Main Pin	1.75" x 20"
Rear Cylinder Pin	1" x 6"
Front Cylinder Pin	1" x 5.5"
Weight	1,025 lbs.




A GRAPPLES

Standard Rock Grapples

72" Model #33011

79" Model #33167

82" Model #33224

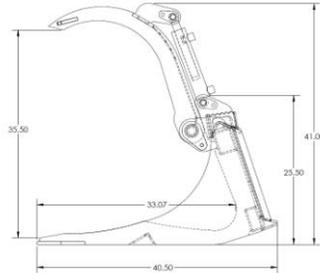

-  Built heavy duty to handle the toughest jobs
-  Dig, grab, pull, clear and sift with one tool
-  Excellent for all your landscaping or demolition duties
-  Serrated tooth design grabs & holds the toughest materials


Specifications	
Width	72", 79", 82"
Overall Height - Closed	27"
Overall Height - Open	41"
Overall Depth	40.5"
Grapple Opening	35.5"
Depth of Bucket	33"
Tines	3/8" - Grade 50
Cutting Edge	1/2" x 8" - Grade 50
Top Tube	3" x 4" x 1/4"
Bottom Tube	2" x 4" x 1/4"
Grapple Arms	1/2" Grade 50 - Laser Cut
Cylinders	2" x 8" - Welded
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Main Pin	1.75" x 20"
Rear Cylinder Pin	1" x 6"
Front Cylinder Pin	1" x 5.5"
Weight	72" = 900 lbs, 79" = 987 lbs, 82" = 1025 lbs

Heavy Duty Rock Grapples

72" Model #33004

79" Model #33215

82" Model #33216

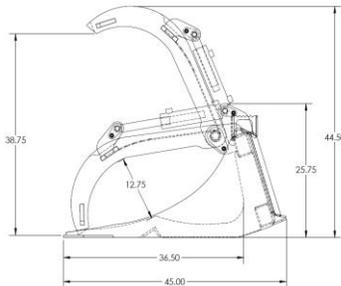


-  Designed to leave the dirt behind when picking up unwanted material
-  Independent grapples with greaseable pivot points

Specifications	
Width	72", 79", 82"
Overall Height - Closed	27"
Overall Height - Open	44"
Overall Depth	46"
Grapple Opening	38"
Depth of Bucket	37"
Tines	3/8" - Grade 50
Cutting Edge	1/2" x 10" - Grade 50
Top Tube	3" x 4" x 1/4"
Bottom Tube	3" x 4" x 1/4"
Grapple Arms	1/2" Grade 50 - Laser Cut
Cylinders	2 1/2" x 8" - Welded
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Main Pin	1.75" x 20"
Rear Cylinder Pin	1" x 6"
Front Cylinder Pin	1" x 5.5"
Weight	72" = 1100 Lbs, 79" = 1264 lbs, 82" = 1312 lbs



Heavy Duty Low Profile Bucket W/Grapple


60" Model #33270, 68" Model #33271
72" Model #33267, 78" Model #33272
80" Model #33273, 84" Model #33274
Also Available with Teeth

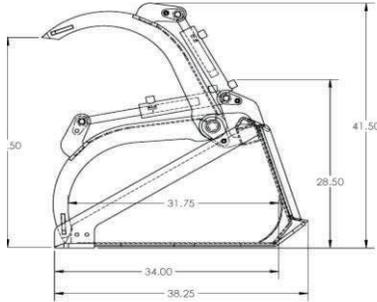

Specifications	
Overall Width	60", 68", 72", 78", 80" & 84"
Overall Height - Closed	28½"
Overall Height - Open	41½"
Overall Depth	38¼"
Grapple Opening	35½"
Depth of Bucket	34"
Main Body Thickness	3/16"
Side Cutting Edge	3/8" Grade 50
Wear Bars	1/2" Grade 50 - 10" Wide
Mounting Plate	5/16" HR Steel
Cutting Edge	3/4" x 6"
Grapple Arms	1/2" Grade 50 - Laser Cut
Cylinders	2" x 8" Welded
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerk
Struck Capacity cu. ft.	(60" 13.2) (68" 15) (72" 15.9) (78" 17.5) (80" 17.75) (84" 18.5)
Heaped Capacity cu. ft.	(60" 15.8) (68" 18) (72" 19) (78" 20.5) (80" 20.12) (84" 22.25)
Weights (Lbs.)	(60" 827) (68" 867) (72" 872) (78" 917) (80" 952) (84" 972)

-  Low profile for better visibility of the cutting edge
-  Excellent for all your landscaping or demolition duties
-  Reinforced bucket liner for longer life and less buckling

72" Combination 4 in 1 Bucket Model #33067

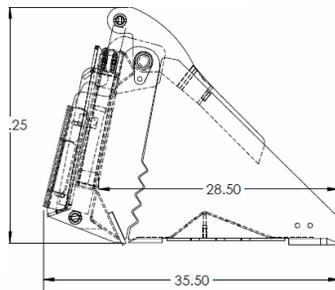

Specifications	
Overall Width	72"
Overall Height	28"
Overall Depth	30"
Bucket Thickness	3/16"
Side Plates	3/8"
Bucket Bottom	Reinforced Grid work between the 2 plates
Front Cutting Edge	5/8" x 6" with holes (6" Spacing) 1060 Cutting Edge
Rear Cutting Edge	1/2" x 4" 1060 Cutting Edge
Dozer Edge	1/2" x 4" Grade 50 Steel - Laser Cut
Cylinders	2" x 8" Welded Cross Tube
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Hydraulic Cylinder Covers	Standard
Pivot Points	Grease Zerk
Weight	876 Lbs.


-  Our best multi-use bucket
-  Great for precise distribution of materials
-  4 uses include: Clamshell Bucket, Dozer, Bottom Dump, Standard Bucket
-  Reinforced bucket and clamshell



A GRAPPLES

Utility Grapple

72" Model #23001

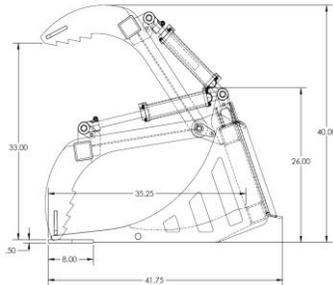

-  Designed to leave the dirt behind
-  Dig, grab, pull, clear and sift with one tool
-  Independent grapples with greaseable main pin

Specifications


Width	72"
Overall Height - Closed	26"
Overall Height - Open	40"
Overall Depth	41.75"
Grapple Opening	33"
Depth of Bucket	35.25"
Cutting Edge	1/2" x 8" - Grade 50
Top Tube	3" x 3" x 3/16"
Bottom Tube	3" x 3" x 3/16"
Grapple Arms	3/8" Grade 50
Cylinders	2" x 8" - Clevis
Hydraulic Couplers	Optional
Hydraulic Hoses	3/8"
PSI Max	2,500 PSI
Weight	72" = 783 lbs

Recommended for loaders up to 2250 lb total lift capacity

Compact Tractor

Brush Grapples

60" Model #33132
72" Model #33126

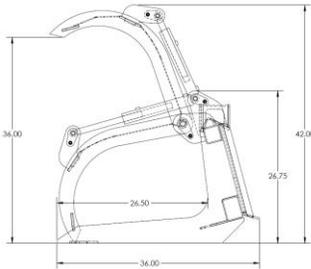

-  Gusseted between teeth for added strength
-  Handle uneven, odd-shaped material
-  Designed to be light but strong so tractor owners can use their tractor to its full potential

Specifications

Width	60", 72"
Overall Height - Closed	26 3/4"
Overall Height - Open	42"
Overall Depth	36"
Grapple Opening	36"
Depth of Bucket	26 1/2"
Tines	5/16" - Grade 50
Top Tube	3" x 3" x 3/16"
Bottom Tube	3" x 4" x 3/16"
Grapple Arms	1/4" A-36
Cylinders	1 1/2" Bore
Hydraulic Couplers	Not Included
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerk
Main Pin	1" x 20"
Cylinder Pins	1" x 5 1/2"
Weight	60" = 465 lbs 72" = 497 lbs

Recommended for loaders up to 1500 lb total lift capacity




Bale Grapples

72" Model #33225

79" Model #33226

82" Model #33227

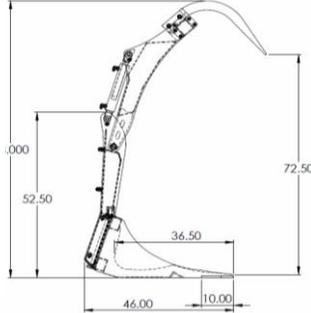


-  Easily lift 2 large bales at once
-  Open bottom lets the debris fall through
-  Large jaw opening for handling round bales
-  Curved jaw teeth penetrate the bale, minimizing damage

Specifications	
Width	72", 79", 82"
Overall Height - Closed	55"
Overall Height - Open	78"
Overall Depth	60"
Grapple Opening	73"
Depth of Bucket	40"
Tines	3/8" - Grade 50
Cutting Edge	1/2" x 10" - Grade 50
Top Tube	3" x 4" x 1/4"
Bottom Tube	3" x 4" x 1/4"
Grapple Tines	5/8" T-1 - Laser Cut
Cylinders	2" x 12" - Welded Clevis
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Weight	72" = 1204 lbs, 79" = 1289 lbs, 82" = 1342 lbs

Round Tine Grapples

72" Model #33029

84" Model #33366

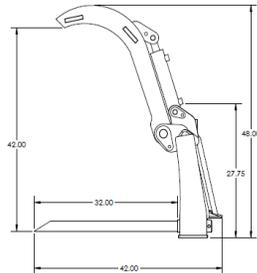


-  Independent, dual grapples to handle the toughest of loads
-  Designed to pick up brush and debris while leaving the dirt behind
-  Durable construction for years of use

Specifications	
Width	72", 84"
Overall Height - Closed	27"
Overall Height - Open	44"
Overall Depth	42"
Grapple Opening	40"
Depth of Bucket	32 1/2"
Tines	2" 1045 Cold Rolled Round
Bucket Thickness	3/16", 1/4" & 3/8" Frame Work, Laser Cut
Bottom Plate	1/2" Grade 50 Steel
Grapple Arms	1/2" Grade 50 Steel, laser cut
Cylinders	2 1/2" Bore
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Main Pin	1.75" x 22"
Rear Cylinder Pin	1" x 6"
Front Cylinder Pin	1" x 5 1/2"
Weight	72" = 1,195 lbs, 84" = 1375 lbs



Stump Grapple

Model #33032

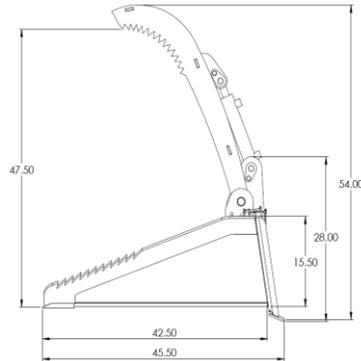

Many uses including:
 Stump Removal
 Tree Plucking
 Digging Trenches
 Moving Rock
 Loading Logs
 Pulling Posts Out
 and more




Optional Weld on Teeth

Specifications

Overall Width	45"
Overall Height - Closed	28 $\frac{1}{4}$ "
Overall Height - Open	47"
Overall Depth	46"
Grapple Opening	45-1/2"
Bucket Depth	42-1/2"
Bucket Thickness	5/16" Grade 50
Side Cutting Edge	1/2" Grade 50
Wear Bars	1/2" Grade 50
Grapple Arm	1/2" Grade 50 - Laser Cut
Cylinder	2-1/2" x 8" Welded Cross Tube
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Main Pin	1.5" x 15"
Rear Cylinder Pin	1" x 6"
Front Cylinder Pin	1" x 5 $\frac{1}{2}$ "
Weight	500 lbs.

Standard Manure Grapple

Model # 33246

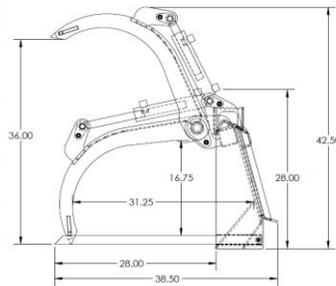

Independent grapples with greaseable main pin



Excellent for many different materials including manure, brush, hay, straw and light demolition




Replaceable tines constructed of 1 $\frac{1}{2}$ " 1144 stress relieved steel, Ultimate Tensile Strength of 115,000 psi

Specifications

Width	72"
Overall Height - Closed	28"
Overall Height - Open	42 $\frac{1}{2}$ "
Overall Depth	38 $\frac{1}{2}$ "
Grapple Opening	36"
Depth of Bucket	31 $\frac{1}{4}$ "
Replaceable Tines	1 $\frac{1}{2}$ " 1144 Steel
Space Between Tines	5 $\frac{3}{4}$ "
Main Body	1/4" A36 HRP& O
Grapple Arms	3/8" Grade 50
Cylinders	2" x 8" - Welded Cross Tube
Hydraulic Couplers	Optional
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Weight	72" = 809 lbs




Grapple Rake 72" Model #33078

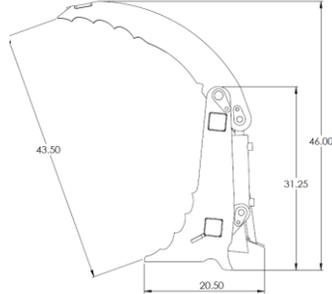

-  Easily pick up debris
-  Ability to use as a root rake
-  Great for raking, piling, storm clean-up and demolition
-  Excellent for rake or back dragging

Specifications	
Overall Width	70½"
Overall Height - Closed	31¼"
Overall Height - Open	46"
Overall Depth	20½"
Grapple Opening	43½"
Tines	1/2" Grade 50
Tubes	3" x 3" x 1/4"
Grapple Arms	1/2" Grade 50 - Laser Cut
Cylinders	2-1/2" x 8" Welded Cross Tube
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Weight	830 lbs.

Dual Arm Grapple Rake 72" Model #33220 78" Model #33221

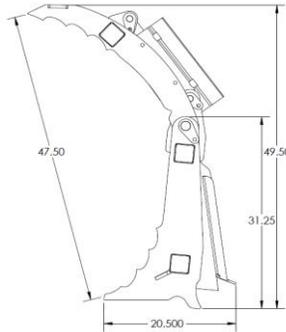

-  Independent Grapple Arms for grabbing uneven loads
-  Serrated tooth design grabs and holds tight

Specifications	
Overall Width	72" & 78"
Overall Height - Closed	31¼"
Overall Height - Open	49½"
Overall Depth	20½"
Grapple Opening	47½"
Tines	1/2" Grade 50
Tubes	3" x 3" x 1/4"
Grapple Arms	1/2" Grade 50 - Laser Cut
Cylinders	2-1/2" x 8" Welded Cross Tube
Hydraulic Couplers	Flat Face
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Weight	72" 865 Lbs 78" 950 Lbs





Heavy Duty Low Profile Scrap Grapple


60" Model #33290, 68" Model #33291

72" Model #33292, 78" Model #33293

80" Model #33294, 84" Model #33295

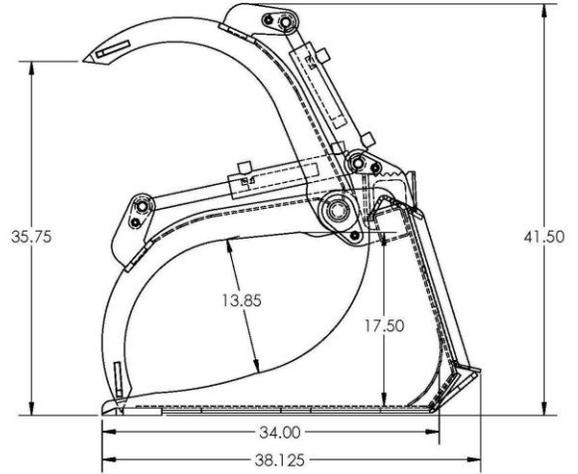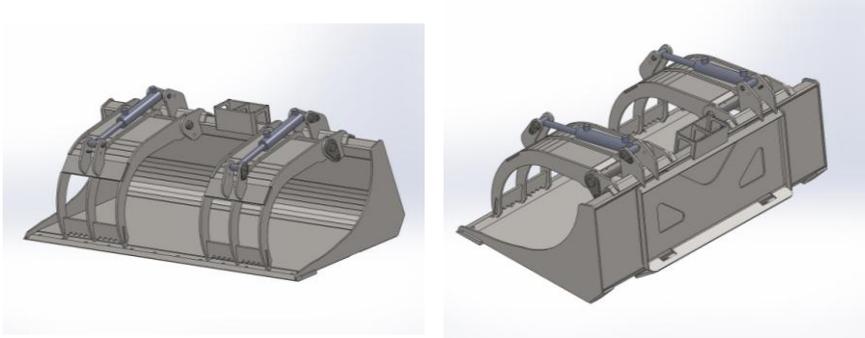

-  Low profile for better visibility of the cutting edge
-  Excellent for all your landscaping or demolition duties
-  Reinforced bucket liner for longer life and less buckling

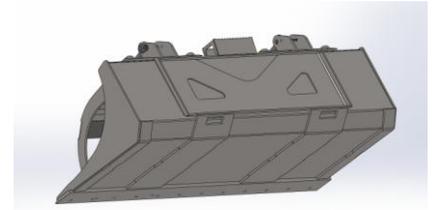

Specifications

Overall Width	60", 68", 72", 78", 80" & 84"
Overall Height - Closed	28½"
Overall Height - Open	41½"
Overall Depth	38.125"
Grapple Opening	35¾"
Depth of Bucket	34
Main Body Thickness	3/16"
Side Plate	3/8" Grade 50
Wear Bars	1/2" Grade 50 - 10" Wide
Mounting Plate	5/16" HR Steel
Cutting Edge	3/4" x 6"
Grapple Arms	1/2" Grade 50 - Laser Cut
Cylinders	2" x 8" Welded
Hydraulic Hoses	3/8"
PSI Max	3,000 PSI
Pivot Points	Grease Zerks
Struck Capacity cu. ft.	(60" 13.2) (68" 15) (72" 15.9) (78" 17.5) (80" 17.75) (84" 18.5)
Heaped Capacity cu. ft.	(60" 15.8) (68" 18) (72" 19) (78" 20.5) (80" 20.12) (84" 22.25)
Weights (Lbs.)	(60" 842) (68" 882) (72" 897) (78" 937) (80" 980) (84" 996)



Rotary Brush Cutter-Direct Std Flow

60" Model #33057

66" Model #33092

72" Model #33058

78" Model #33083



Specifications

Blade Carrier	Laser Cut Plate
Blade Rotation	Counter Clockwise
Cutting Capacity	Up to 3"
Drive	Eskridge
Motor	6.1 cu in
Hydraulic Couplers	Flat Face 1/2" Body - ISO16028
Hydraulic Hoses	3/4"
PSI Max	3,000 PSI
Wear Bars	3/8" Thick - Welded on
Front Chain Mount	Replaceable 5/16" chain - 5 links long
Rear Chain Mount	Replaceable 5/16" chain - 3 links long

ADDITIONAL SPECIFICATIONS	60" #33057	66" #33092	72" #33058	78" #33083
Overall Width	64"	70"	75.5"	85"
Overall Length	74"	82"	88"	96"
Overall Height	22"	22"	22"	22"
Blades, Bolts	Blades: 5/8" x 5" and 2.5" Drop - 19.25" hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2.5" Drop - 19.25" hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2 1/2" Drop - 25.25 hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2 1/2" Drop - 25.25 hole to tip Bolts: BB100A
Blade Carrier	3/4" T1, 27" Diameter	3/4" T1, 32" Diameter	3/4" T1, 27" Diameter	3/4" T1, 35 1/4" Diameter
Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut
Flow	15 - 25 GPM	15 - 25 GPM	15 - 25 GPM	15 - 25 GPM
Blade Tip Speed (FPM)	Min @ 15 GPM (8,547 FPM) Max @ 25 GPM (14244 FPM)	Min @ 15 GPM (9587 FPM) Max @ 25 GPM (15978 FPM)	Min @ 15 GPM (8482 FPM) Max @ 25 GPM (14136 FPM)	Min @ 15 GPM (11594 FPM) Max @ 25 GPM (19323 FPM)
Deck Thickness	1/4"	1/4"	1/4"	1/4"
Weight	925 Lbs.	1095 Lbs.	1195 Lbs.	1560 Lbs.

 Manufactured as one of the toughest Brush Cutters available

 Great for cleaning trails or construction sites

 Cut grass or brush up to 3"

 Painted using a 2 part Urethane process for an exceptional finish



Rotary Brush Cutter-Gear Box Std Flow

60" Model #33066

66" Model #33091

72" Model #33088

78" Model #33089



Specifications

Blade Carrier	Spun Stump Jumper
Blade Rotation	Counter Clockwise
Cutting Capacity	Up to 2½"
Drive	Eskridge
Motor	8.6 cu in
Hydraulic Couplers	Flat Face 1/2" Body - ISO16028
Hydraulic Hoses	3/4"
PSI Max	3,000 PSI
Wear Bars	3/8" Thick - Welded on
Front Chain Mount	Replaceable 5/16" chain - 5 links long
Rear Chain Mount	Replaceable 5/16" chain - 3 links long

Additional Specifications	60" #33066	66" #33091	72" #33088	78" #33089
Overall Width	64"	70"	75.5"	85"
Overall Length	74"	82"	88"	96"
Overall Height	22"	22"	24"	22"
Blades, Bolts	Blades: 1/2" x 4" and 2.5" Drop - 19.75" hole to tip /Bolts: BB10	Blades: 5/8" x 5" and 2.5" Drop - 22.25" hole to tip /Bolts: BB10	Blades: 5/8" x 5" and 2½" Drop - 25.25 hole to tip /Bolts: BB10	Blades: 5/8" x 5" and 2½" Drop - 28.25 hole to tip /Bolts: BB10
Blade Carrier	Spun Stump Jumper	Spun Stump Jumper	Spun Stump Jumper	Spun Stump Jumper
Nut	1.125 Fine Thread Top Lock	1.125 Fine Thread Top Lock	1.125 Fine Thread Top Lock	1.125 Fine Thread Top Lock
Flow	15 - 25 GPM	15 - 25 GPM	15 - 25 GPM	15 - 25 GPM
Blade Tip Speed (FPM)	Min @ 15 GPM (8928 FPM) Max @ 25 GPM (14879 FPM)	Min @ 15 GPM (9928 FPM) Max @ 25 GPM (16549 FPM)	Min @ 15 GPM (10775 FPM) Max @ 25 GPM (17958 FPM)	Min @ 15 GPM (12006 FPM) Max @ 25 GPM (20010 FPM)
Deck Thickness	1/4"	1/4"	1/4"	1/4"
Weight	940 Lbs.	1110 Lbs.	1210 Lbs.	1575 Lbs.

 Manufactured as one of the toughest Brush Cutters available

 Great for cleaning trails or construction sites

 Cut grass or brush up to 2½"

 Painted using a 2 part Urethane process for an exceptional finish



Rotary Brush Cutter-High Flow

- 60" Model #33085
- 66" Model #33093
- 72" Model #33086
- 78" Model #33087



Specifications	
Blade Carrier	Laser Cut Plate
Blade Rotation	Counter Clockwise
Cutting Capacity	Up to 4"
Drive	Eskridge
Motor	11.9 cu in
Hydraulic Couplers	Flat Face 3/4" Body - ISO16028
Hydraulic Hoses	1"
PSI Max	3,000 PSI
Wear Bars	3/8" Thick - Welded on
Front Chain Mount	Replaceable 5/16" chain - 5 links long
Rear Chain Mount	Replaceable 5/16" chain - 3 links long

Additional Specifications	60" #33085	66" #33093	72" #33086	78" #33087
Overall Width	64"	70"	76"	85"
Overall Length	74"	82"	90"	96"
Overall Height	26"	26"	26"	26"
Blades, Bolts	Blades: 5/8" x 5" and 2 1/2" Drop - 19.25" hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2 1/2" Drop - 19.25" hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2 1/2" Drop - 25.25 hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2 1/2" Drop - 25.25 hole to tip Bolts: BB100A
Blade Carrier	3/4" T1, 27" Diameter	3/4" T1, 35 1/4" Diameter	3/4" T1, 27" Diameter	3/4" T1, 35 1/4" Diameter
Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut
Flow	26-40 GPM	26-40 GPM	26-40 GPM	26-40 GPM
Blade Tip Speed (FPM)	Min @ 26 GPM (7660 FPM) Max @ 40 GPM (11784 FPM)	Min @ 26 GPM (8518 FPM) Max @ 40 GPM (13105 FPM)	Min @ 26 GPM (9245 FPM) Max @ 240GPM (14222 FPM)	Min @ 26 GPM (10301 FPM) Max @ 40 GPM (15848 FPM)
Deck Thickness	1/4"	1/4"	1/4"	1/4"
Weight	975 Lbs.	1125 Lbs.	1230 Lbs.	1595 Lbs.

 Manufactured as one of the toughest Brush Cutters available

 Great for cleaning trails or construction sites

 Cut grass or brush up to 4"

 Painted using a 2 part Urethane process for an exceptional finish



Open Front Rotary Brush Cutter

Direct Std Flow

60" Model #33253

66" Model #33254

72" Model #33252

78" Model #33255



Specifications

Blade Carrier	Laser Cut Plate
Blade Rotation	Counter Clockwise
Cutting Capacity	Up to 3½"
Drive	Eskridge
Motor	6.1 cu in
Hydraulic Couplers	Flat Face 1/2" Body - ISO16028
Hydraulic Hoses	3/4"
PSI Max	3,000 PSI
Wear Bars	3/8" Thick - Welded on

Additional Specifications	60" #33253	66" #33254	72" #33252	78" #33255
Overall Width	64"	70"	75.5"	85"
Overall Length	74"	82"	88"	96"
Overall Height	22"	22"	22"	22"
Blades, Bolts	Blades: 5/8" x 5" and 2.5" Drop - 19.25" hole to tip /Bolts: BB100A	Blades: 5/8" x 5" and 2.5" Drop - 19.25" hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2½" Drop - 25.25 hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2½" Drop - 25.25 hole to tip Bolts: BB100A
Blade Carrier	3/4" T1, 27" Diameter	3/4" T1, 32" Diameter	3/4" T1, 27" Diameter	3/4" T1, 35¼" Diameter
Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut
Flow	15 - 25 GPM	15 - 25 GPM	15 - 25 GPM	15 - 25 GPM
Blade Tip Speed (FPM)	Min @ 15 GPM (8,547 FPM) Max @ 25 GPM (14244 FPM)	Min @ 15 GPM (9587 FPM) Max @ 25 GPM (15978 FPM)	Min @ 15 GPM (8482 FPM) Max @ 25 GPM (14136 FPM)	Min @ 15 GPM (11594 FPM) Max @ 25 GPM (19323 FPM)
Deck Thickness	1/4"	1/4"	1/4"	1/4"
Weight	950 Lbs.	1120 Lbs.	1220 Lbs.	1585 Lbs.

 Manufactured as one of the toughest Brush Cutters available

 Cut grass or brush up to 3½"

 Great for cleaning trails or construction sites

 Painted using a 2 part Urethane process for an exceptional finish



Open Front Rotary Brush Cutter

Gear Box Std Flow

60" Model #33257

66" Model #33258

72" Model #33256

78" Model #33259



Specifications

Blade Carrier	Spun Stump Jumper
Blade Rotation	Counter Clockwise
Cutting Capacity	Up to 3"
Drive	Esckridge
Motor	8.6 cu in
Hydraulic Couplers	Flat Face 1/2" Body - ISO16028
Hydraulic Hoses	3/4"
PSI Max	3,000 PSI
Wear Bars	3/8" Thick - Welded on

Additional Specifications	60" #33257	66" #33258	72" #33256	78" #33259
Overall Width	64"	70"	75.5"	85"
Overall Length	74"	82"	88"	96"
Overall Height	22"	22"	22"	22"
Blades, Bolts	Blades: 1/2" x 4" and 2.5" Drop - 19.75" hole to tip /Bolts: BB10	Blades: 5/8" x 5" and 2.5" Drop - 22.25" hole to tip Bolts: BB10	Blades: 5/8" x 5" and 2 1/2" Drop - 25.25 hole to tip Bolts: BB10	Blades: 5/8" x 5" and 2 1/2" Drop - 28.25 hole to tip Bolts: BB10
Blade Carrier	Spun Stump Jumper	Spun Stump Jumper	Spun Stump Jumper	Spun Stump Jumper
Nut	1.125 Fine Thread Top Lock	1.125 Fine Thread Top Lock	1.125 Fine Thread Top Lock	1.125 Fine Thread Top Lock
Flow	15 - 25 GPM	15 - 25 GPM	15 - 25 GPM	15 - 25 GPM
Blade Tip Speed (FPM)	Min @ 15 GPM (8928 FPM) Max @ 25 GPM (14879 FPM)	Min @ 15 GPM (9928 FPM) Max @ 25 GPM (16549 FPM)	Min @ 15 GPM (10775 FPM) Max @ 25 GPM (17958 FPM)	Min @ 15 GPM (12006 FPM) Max @ 25 GPM (20010 FPM)
Deck Thickness	1/4"	1/4"	1/4"	1/4"
Weight	965 Lbs.	1135 Lbs.	1235 Lbs.	1600 Lbs.

 Manufactured as one of the toughest Brush Cutters available

 Great for cleaning trails or construction sites

 Cut grass or brush up to 3"

 Painted using a 2 part Urethane process for an exceptional finish



Open Front Rotary Brush Cutter High Flow

60" Model #33261

66" Model #33262

72" Model #33260

78" Model #33263



Specifications

Blade Carrier	Laser Cut Plate
Blade Rotation	Counter Clockwise
Cutting Capacity	Up to 5"
Drive	Eskridge
Motor	11.9 cu in
Hydraulic Couplers	Flat Face 1/2" Body - ISO16028
Hydraulic Hoses	3/4"
PSI Max	3,000 PSI
Wear Bars	3/8" Thick - Welded on

Additional Specifications	60" #33261	66" #33262	72" #33260	78" #33263
Overall Width	64"	70"	75.5"	85"
Overall Length	74"	82"	88"	96"
Overall Height	22"	22"	22"	22"
Blades, Bolts	Blades: 5/8" x 5" and 2 1/2" Drop - 19.25" hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2 1/2" Drop - 19.25" hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2 1/2" Drop - 25.25 hole to tip Bolts: BB100A	Blades: 5/8" x 5" and 2 1/2" Drop - 25.25 hole to tip Bolts: BB100A
Blade Carrier	3/4" T1, 27" Diameter	3/4" T1, 32" Diameter	3/4" T1, 27" Diameter	3/4" T1, 35 1/4" Diameter
Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut	1.25 - 7" Castle Nut
Flow	26-40 GPM	26-40 GPM	26-40 GPM	26-40 GPM
Blade Tip Speed (FPM)	Min @ 26 GPM (7660 FPM) Max @ 40 GPM (11784 FPM)	Min @ 26 GPM (8518 FPM) Max @ 40 GPM (13105 FPM)	Min @ 26 GPM (9245 FPM) Max @ 240GPM (14222 FPM)	Min @ 26 GPM (10301 FPM) Max @ 40 GPM (15848 FPM)
Deck Thickness	1/4"	1/4"	1/4"	1/4"
Weight	1000 Lbs.	1150 Lbs.	1255 Lbs.	1620 Lbs.

 Manufactured as one of the toughest Brush Cutters available

 Cut grass or brush up to 5"

 Great for cleaning trails or construction sites

 Painted using a 2 part Urethane process for an exceptional finish



72" High Flow Extreme Tree Cutter

Model #33064



Specifications

Overall Width	75.5"
Overall Length	81"
Overall Height	26"
Blade Carrier	(2) 5/8" T-1 Plates - Bolted Together
Blades	5/8" x 6" x 17" Chrome Moly Hardened & Certified
Blade holder	5/8" T-1 Welded & Bolted Plates (1000 lbs with blades)
Blade Rotation	Counter Clockwise
Cutting Capacity	Up to 6"
Drive	Direct
Motor	11.9 cu. in.
Flow	26 - 45 GPM
Blade Tip Speed FPM	Min @ 26 GPM (9,311) Max @ 45 GPM (16114)
Hydraulic Couplers	3/4" Flat Face
Hydraulic Hoses	1" Sleeved Hose, 5000 PSI rated
PSI Min / Max	4,000 PSI / Relief Valve 4000/1200
Deck Thickness	1/4"
Wear Bars & Push Bar	1/2" Thick, Grade 50 - Welded on
Weight	2,075 Lbs.

-  Rugged design for extreme applications
-  4 Blade Design for the ultimate cut
-  Clear cut the heaviest brush, saplings and trees
-  Heavy duty, reinforced deck with push bar
-  Recommended for trees up to 6"
-  Painted using a 2 part Urethane process for an exceptional finish




Heavy Duty Rock Bucket/Skeleton

72" Model #33001

79" Model #33154

82" Model #33172

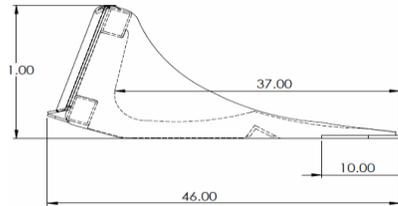

-  Perfect tool for digging material from demolition jobs
-  Unique tooth design to hold material in bucket
-  Clears roots and rocks while leaving the dirt behind


Specifications	
Overall Width	72", 79", 82"
Overall Height	21"
Overall Depth	46"
Inside Depth of Bucket	37"
Tines	3/8" - Grade 50
Width Between Tines	3"
Cutting Edge	1/2" x 10" - Grade 50
Top Tube	3" x 4" x 1/4"
Bottom Tube	3" x 4" x 1/4"
Weight	72" = 700 lbs., 79" = 768 lbs, 82" = 803 lbs

Heavy Duty Rock Bucket 5" Spacing

72" Model #33165

79" Model #33158

82" Model #33166

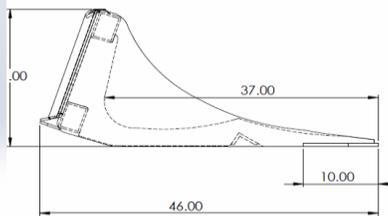

-  Heavy duty digging and lifting
-  Good for large rocks
-  Durable construction for years of use

Specifications	
Overall Width	72", 79", 82"
Overall Height	21"
Overall Depth	46"
Inside Depth of Bucket	37"
Tines	3/8" - Grade 50
Width Between Tines	5"
Cutting Edge	1/2" x 10" - Grade 50
Top Tube	3" x 4" x 1/4"
Bottom Tube	3" x 4" x 1/4"
Weight	72" = 550 lbs, 84" = 598 lbs 82" = 612 lbs




D BUCKETS

Standard Rock Bucket/Skeleton

72" Model #33047

79" Model #33062

82" Model #33056

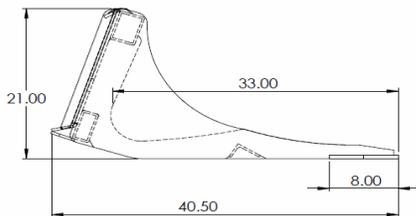


-  Heavy duty digging & lifting
-  Unique tooth design to hold material in bucket
-  Good for both small and large rocks
-  Perfect for digging material from demolition jobs

Specifications	
Overall Width	72", 79", 82"
Overall Height	21"
Overall Depth	40½"
Inside Depth of Bucket	33"
Tines	3/8" - Grade 50
Width Between Tines	3"
Cutting Edge	1/2" x 8" - Grade 50
Top Tube	3" x 4" x 1/4"
Bottom Tube	2" x 4" x 1/4"
Weight	72" = 600 Lbs., 79" = 687 lbs, 82" = 715 lbs

Utility Rock Bucket / Skeleton

72" With 3/8" Tines - Model# 23000

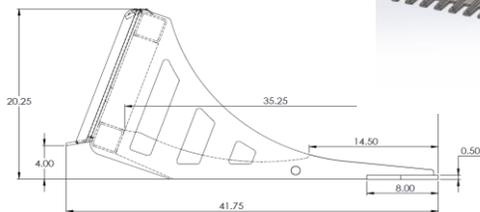

-  Clear rocks & roots
-  Digs through the dirt, picking up unwanted material while leaving the dirt behind
-  Open bottom and back gives excellent visibility
-  Efficient for back-dragging


Specifications	
Overall Width	72"
Overall Height	20¼"
Overall Depth	41¾"
Inside Depth of Bucket	35¼"
Cutting Edge	1/2" x 8" - Grade 50
Top Tube	3" x 3" x 3/16"
Bottom Tube	3" x 3" x 3/16"
Weights (Lbs.)	550 lbs

**Recommended for loaders
up to 2250 lb total lift capacity**



Heavy Duty Low Profile Bucket


60" Model #33037, 68" Model #33053
 72" Model #33013, 78" Model #33042
 80" Model #33023, 84" Model #33024

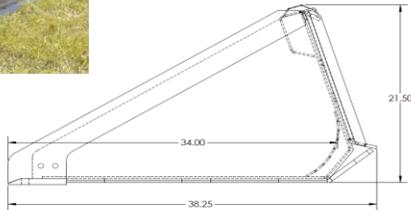

-  Low profile for better visibility of the cutting edge
-  Reinforced bucket liner for longer life and less buckling
-  Holes in cutting edge for optional 5/8" x 8 bolt on cutting edge (6" bolt spacing)

Tooth Bucket

60" Model #33037T, 68" Model #33053T,
 72" Model #33013T, 78" 33042T,
 80" Model #33023T, 84" Model #33024T

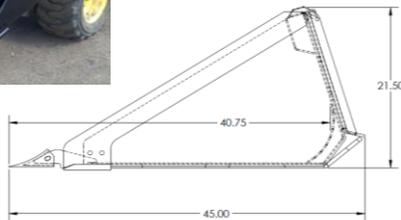

-  Excellent cutting edge visibility
-  Loosen hard pack dirt
-  High break out force
-  Versatile bucket for tough digging and material handling

Specifications

Overall Width	60", 68", 72", 78", 80" & 84"
Overall Height	21½"
Overall Depth	38¼"
Bucket Thickness	3/16"
Side Plates	3/16"
Step Bent Insert	3/16"
Side Cutting Edge	3/8" Grade 50
Wear Bars	3/8" Grade 50
Mounting Plate	5/16" HR Steel
Cutting Edge	3/4" x 6"
Step	Extruded Grips
Struck Capacity cu. ft.	(60" 13.2) (68" 15) (72" 15.9) (78" 17.5) (80" 17.75) (84" 18.5)
Heaped Capacity cu. ft.	(60" 15.8) (68" 18) (72" 19) (78" 20.5) (80" 20.12) (84" 22.25)
Weights (Lbs.)	(60" 485) (68" 525) (72" 530) (78" 575) (80" 610) (84" 630)

Specifications


Overall Width	60", 68", 72", 78", 80", 84"
Overall Height	21½"
Overall Depth	45"
Bucket Thickness	3/16"
Side Plates	3/16"
Step Bent Insert	3/16"
Side Cutting Edge	3/8" Grade 50
Wear Bars	3/8" Grade 50
Mounting Plate	5/16" HR Steel
Cutting Edge	3/4" x 6"
Step	Extruded Grips
Struck Capacity (cu. ft.)	(60" - 13.2) (68" - 15) (72" - 15.9) (78" - 17.5) (80" - 17.75) (84" - 18.5)
Heaped Capacity (cu. ft.)	(60" - 15.8) (68" - 18) (72" - 19) (78" - 20.5) (80" - 20.12) (84" - 22.25)
Weights (Lbs.)	(60" - 565) (68" - 605) (72" - 620) (78" - 665) (80" - 705) (84" - 730)



D BUCKETS

Utility Buckets

- 66" Model #33012
- 72" Model #33184
- 84" Model #33185

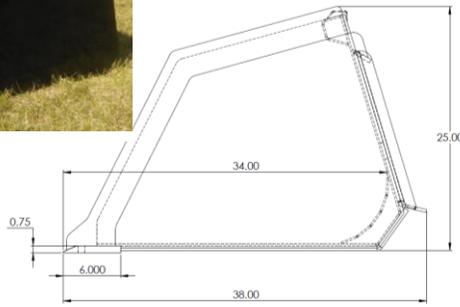


 Inside of bucket is fully welded for added strength

 Excellent for general purpose use

 Option to add bolt-on cutting edge

Stump Bucket

Model# 33040

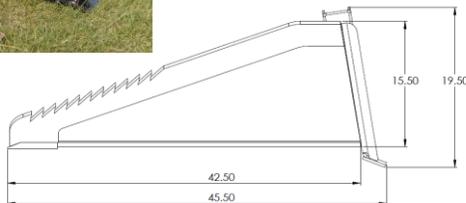

 Excellent for digging up stumps, removing rocks and digging trenches

 Takes the work out of digging

 Painted using a 2 part Urethane process for an exceptional finish

Specifications

Overall Width	66", 72", 84"
Overall Height	25"
Overall Depth	38.5"
Bucket Thickness	3/16"
Side Plates	3/16"
Step Bent Insert	3/16"
Side Cutting Edge	3/8" Grade 50
Wear Bars	3/8" Grade 50
Mounting Plate	5/16" HR Steel
Cutting Edge	3/4" x 6"
Step	Extruded Grips
Struck Capacity cu. ft.	(66" 20.5) (72" 21.9) (84" 25)
Heaped Capacity cu. ft.	(66" 24.6) (72" 26.2) (84" 30)
Weights (Lbs.)	(66" 576) (72" 630) (84" 735)


Specifications

Overall Width	45"
Overall Height	18"
Overall Depth	44"
Bucket Thickness	5/16" Grade 50
Side Cutting Edge	1/2" Grade 50
Wear Bars	1/2" Grade 50
Cutting Edge	3/4" x 6"
Weight	353 lbs.



Sifter Bucket

75" Model# 33248

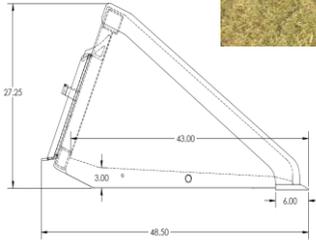



-  Great for landscaping, site prep, farm use and demolition work
-  Pick or sift large and small rocks
-  Digs through the dirt, picking up unwanted material while leaving the dirt behind

Specifications

Overall Width	75"
Overall Height	27 $\frac{1}{4}$ "
Overall Depth	48 $\frac{1}{2}$ "
Inside Depth	43"
Tines	1/4"
Width between tines	1"
Cutting Edge	3/4" x 6"
Mounting Plate	5/16" HR Steel
Step	Laser formed, welded on back
Top Tube	3" x 3" x 3/16"
Bottom Tube	3" x 2" x 1/4"
Weights (Lbs.)	876 lbs





Rock Digger Model# 33153

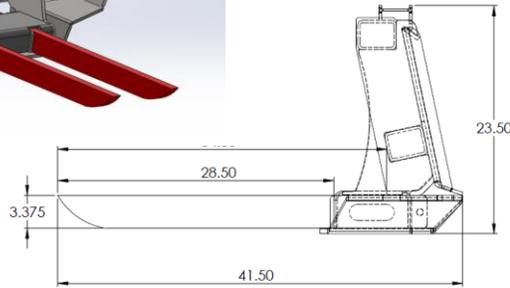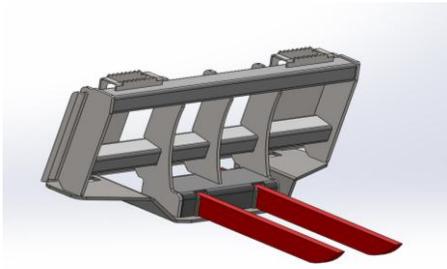

-  1 1/4 T-1 Replaceable Tines
-  Dig out large rocks with ease
-  8 3/4" between tines

Specifications	
Overall Width	45"
Overall Depth	42"
Overall Height	24"
Tines	1-1/4" T-1 Steel
Bucket Thickness	1/2" Grade 50 - Laser Cut Frame Work
Bottom Plate	1/2" Grade 50
Grapple Arm	1" Grade 50 - Laser Cut
Weight	384 lbs.

Rock/Stump Digger Model #33041

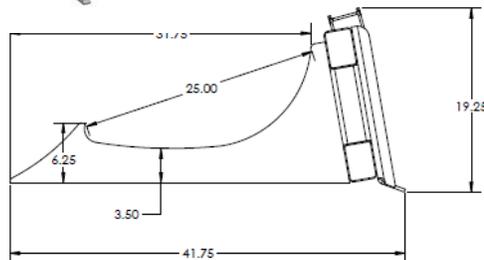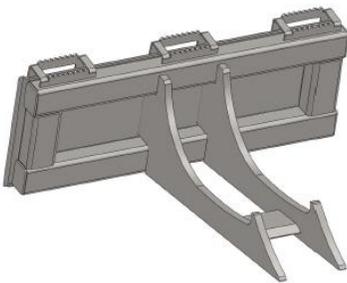


-  1' T-1 Tines
-  7 1/2" between tines
-  Dig out large rocks and stumps with ease

Specifications	
Overall Width	41.75"
Overall Depth	31.25"
Overall Height	19.25"
Tines	1" T-1 Steel
Mount Plate	5/16" Grade 50
Cutting edge	3/4 x 6 1055 Steel
Tubing	3 x 4 x 1/4"
Weight	334 lbs.






Tree Spade Model #33131

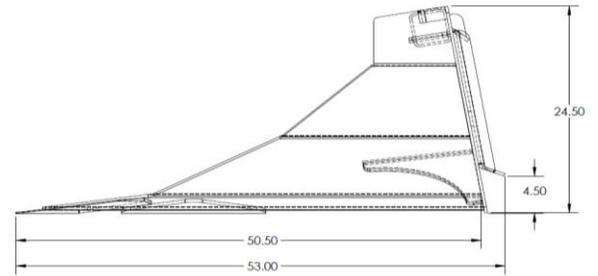

-  Durable construction for years of use
-  Transplant trees
-  Remove Small Rocks
-  Fully Reinforced
-  Painted using a 2 part Urethane process for an exceptional finish

Specifications	
Overall Width	47.5"
Overall Height	25"
Overall Depth	51"
Bucket Thickness	3/8" Grade 50
Top Tube	4 x 4 x .250
Cutting edge	1/2" x 3
Back plate	5/16 Grade 50
Weight	405 lbs

Tree Puller Model #33350

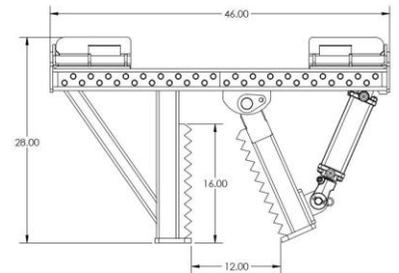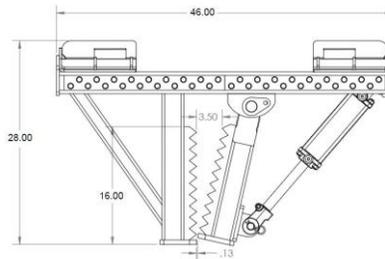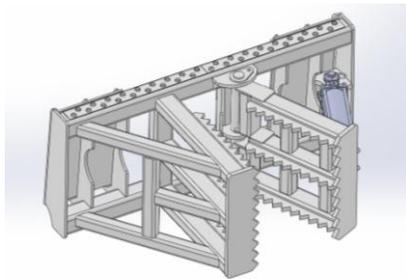

-  Durable construction for years of use
-  Heavy duty lifting
-  Unique tooth design to hold material
-  Clears trees and shrubs
-  Good for both large and small trees
-  Painted using a 2 part Urethane process for exceptional results


Specifications	
Overall Height	20"
Overall Width	46"
Overall Depth	28"
Grapple Opening	12"
Grapple Teeth	5/8 Grade 50
Flat Face Hydraulic Couplers	(Optional)
Hydraulic Hoses	3/8"
Cylinder	2-1/2" x 8"
Main Pin	1-1/2" Greaseable
Weight	396



Log Splitter

30" Model #33018

36" Model #33187

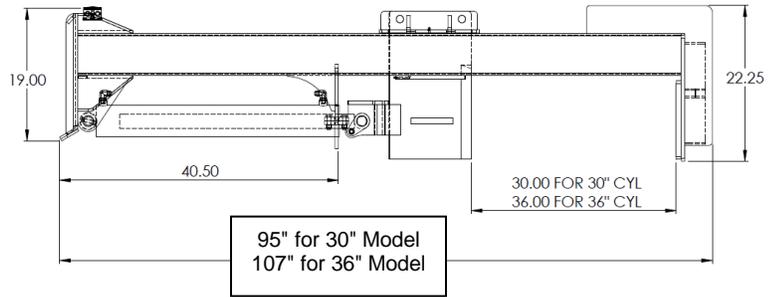


Specifications	
Width	45-3/8"
Height	22"
Length	33018 = 95" 33187 = 107"
Weight	30" 630 lbs, 36" 680 lbs

-  Durable construction for years of use
-  Inverted style allows you to split while staying seated
-  20 tons of force
-  4" psi cylinders
-  Constructed of Grade 50 Steel
-  Comes standard with single splitting wedge, if 4 way wedge is wanted please specify at time of order
-  Painted using a 2 part Urethane process for an exceptional finish



79" Land Plane

Model #33022

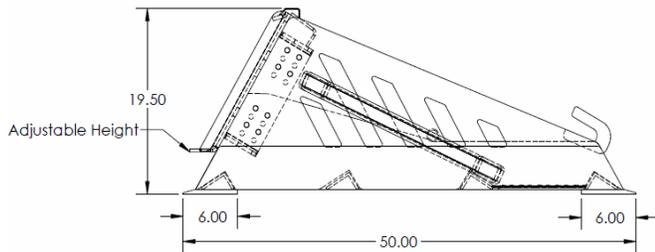



-  Level and grade landscape jobs
-  Prepares lawns for seeding or turf placement
-  Durable construction for years of use
-  Bi-Directional to speed up site preparation
-  Heavy Duty cutting edges
-  Painted using a 2 part Urethane process for an exceptional finish

Specifications

Overall Width	79"
Overall Height	19½" Adjustable
Overall Depth	50"
Frame Work	3/8" Grade 50 Steel
Cutting Edge	1/2" x 6" Front & Back
Mounting Plate	Adjustable
Expanded Metal	5/16" Grade 50 - Laser Cut
Front Bucket Hooks	Standard
Weight	550 lbs



48" Standard Duty
Walk-Thru
Pallet Forks
Model #90001W

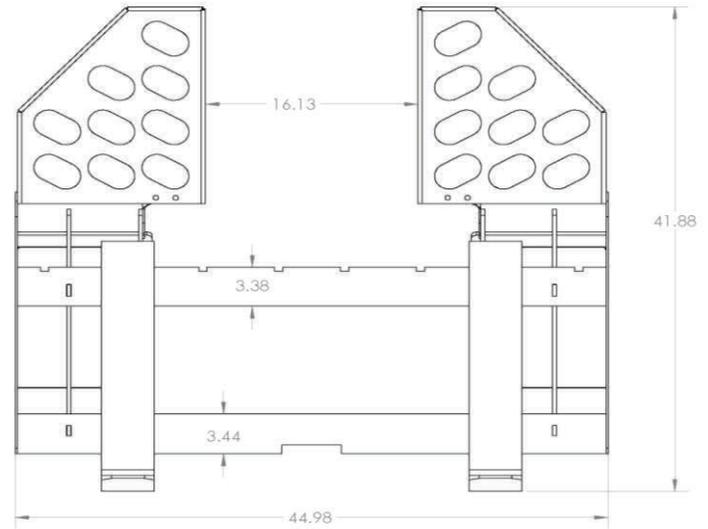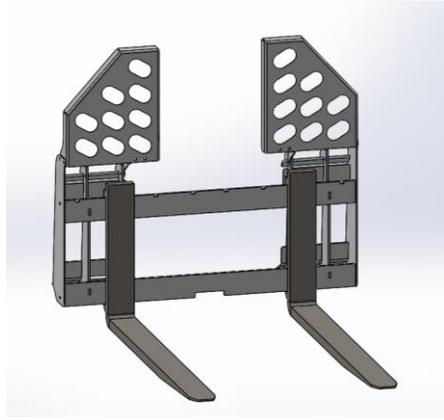

Specifications

Overall Width	45"
Overall Height	42"
Depth	9½"
Top and Bottom Rails	3/8" Grade 50
Fork Length	48"
Fork Width	4"
Fork Thickness	1-3/8"
Tines	Class II Part #80489
Estimated Load Capacity at 24" Load Center (per pair)	4,400 lbs
Weight	345 lbs

FEATURES:

-  Durable construction for years of use
-  Ideal for moving materials around the job site
-  Open and Removable Brick Guard allows for clear vision of load
-  Painted using a 2 part Urethane Process for an exceptional finish

 Designed for use with palletized material only. Keep fork tines as wide as pallet allows. 



 Lift limit is determined by fork capacity or loader capacity, whichever is less. 

 Capacity is based on no more than 1/2 load per fork and load no more than 1/2 way out on each fork. 



Heavy Duty Pallet Forks


Model# 33019-48

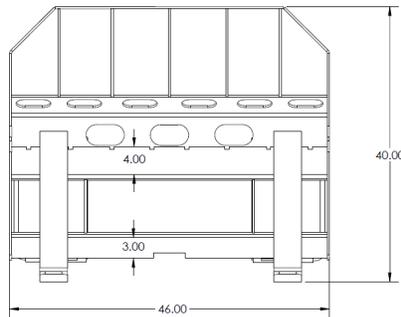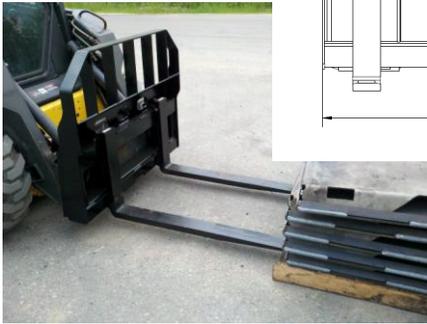

-  Heavy Duty Brick Guard allows for clear vision of load
-  Ideal for moving materials around the job side
-  Built to perform and outlast the competition

Heavy Duty Walk-Thru Pallet Forks

Model #33019-48W

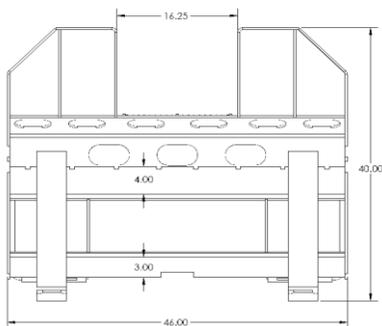

Specifications

Overall Width	46"
Overall Height	40"
Depth	9½"
Top and Bottom Rails	1/2" Grade 50
Fork Length	48"
Fork Width	4"
Fork Thickness	1-3/8"
Tines	Class II Part #80489
Estimated Load Capacity at 24" Load Center (per pair)	4,400 lbs
Weight	525 lbs

Designed for use with palletized material only.

Lift limit is determined by fork capacity or loader capacity, whichever is less.

Capacity is based on no more than 1/2 load per fork and load no more than 1/2 way out on each fork.


Specifications

Overall Width	46"
Overall Height	40"
Depth	9½"
Top and Bottom Rails	1/2" Grade 50
Fork Length	48"
Fork Width	4"
Fork Thickness	1-3/8"
Tines	Class II Part #80489
Estimated Load Capacity at 24" Load Center (per pair)	4,400 lbs
Weight	525 lbs



Clamp-On Pallet Forks

Model #33179

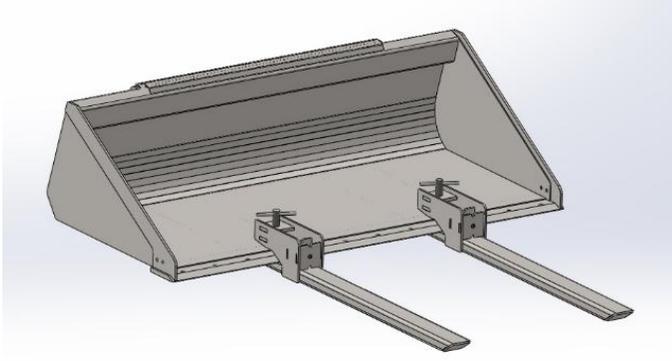

Bucket Not Included

-  Durable construction for years of use
-  Easy on/off design for added convenience
-  Mounts to most loader buckets without tools
-  Built-in stake pocket for a 2 x 4 to be installed as an upright backstop
-  Easy adjustment to any pallet width
-  Built-in stake pocket for a 2 x 4 to be installed as an upright backstop

Specifications

Lift Capacity (Per Set of 2 Pallet Forks)	2,000 lbs.
Overall Tine Length	41-1/4"
Tine Width	4"
Tine Height	2"
Threaded Clamp Rod	1-6 acme
Throat Opening	1-3/8"
Throat Depth	8"
Weight Each	61 lbs.

Designed for use with palletized material only.


Lift limit is determined by fork capacity or loader capacity, whichever is less.

Capacity is based on no more than 1/2 load per fork
and load no more than 1/2 way out on each fork.



Snow Blower

78" Model #33201

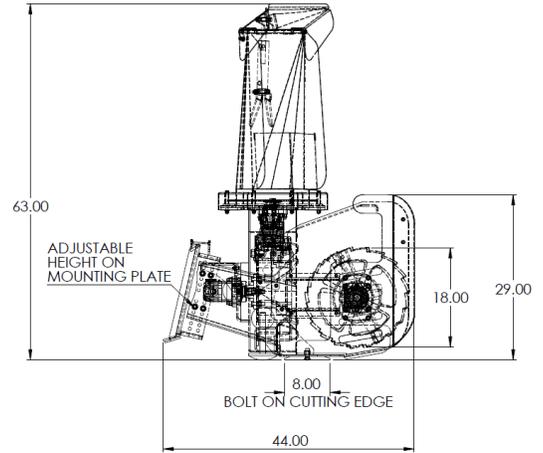

-  Build solid to get through the toughest winter challenges
-  Serrated auger for cutting through hard snow
-  Designed to reduce ice build-up
-  Direct Drive system to reduce maintenance

-  Adjustable height mount plate
-  Double bevel bolt on cutting edge
-  7 ga Body
-  7 ga Side Plate laminated with 1/4"
-  Painted using a 2 part Urethane process for an exceptional finish

Specifications


Overall Width	80"
Overall Depth	44"
Overall Height	63"
Housing Height	29"
Housing Depth	22"
Auger Diameter	18" (Serrated flighting to cut through hard snow)
Fan Diameter	20"
Chute Height	36"
Chute Width	12"
Chute deflector	Electric over hydraulic deflector & chute rotation (270 deg rotation)
Throwing distance	30 to 40 ft
Side wear bars	Weld on
Bottom Cutting Edge	5/8" x 8" Bolt on double bevel / Reversible
Skid Shoes (Optional)	6" Hardened dome with 1" shaft, adjustable height
Hydraulic Couplers	Flat Face 1/2"
Hydraulic Hoses	1/2"
PSI Max	3,000 PSI
Flow	16-25 GPM
Wire Harness	4 Button Pendant, Uses Cigarette lighter for power, or connect to battery
Weight	1165 lbs



Snow Bucket

84" Model #33014

96" Model #33020

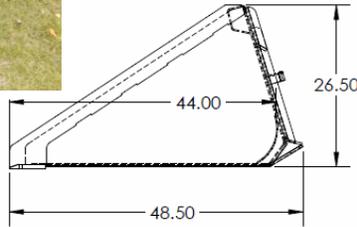


-  Low profile with large capacity
-  Bolt on cutting edge available
-  For snow or lighter materials
-  Designed so you can see the cutting edge

Specifications	
Overall Width	84" & 96"
Overall Height	26½"
Overall Depth	48½"
Bucket Thickness	3/16"
Side Plates	3/16"
Step Bent Insert	3/16"
Side Cutting Edge	3/8" Grade 50
Wear Bars	3/8" Grade 50
Mounting Plate	5/16" A-36 Steel - Extra Tall
Cutting Edge	3/4" x 6"
Step	Laser & Formed, Welded on Back
Struck Capacity cu. ft.	84" = 27.3 cu ft / 96" = 31.2 cu ft
Heaped Capacity cu. ft.	84" = 32.7 cu ft / 96" = 37.4 cu ft
Weights (Lbs.)	84" = 700 lbs, 96" = 800 lbs

Screen Snow Bucket

84" Model #33163 • 96" Model #33162

102" Model# 33196 • 108" Model #33197

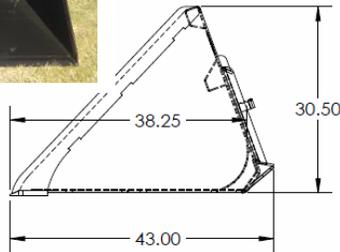


-  Bolt on cutting edge available
-  For snow or lighter materials
-  Screen design allows operator a view to the cutting edge and the load

Specifications	
Overall Width	84", 96", 102", 108"
Overall Height	30½"
Overall Depth	43"
Bucket Thickness	3/16"
Side Plates	3/16"
Step Bent Insert	3/16"
Side Cutting Edge	3/8" Grade 50
Wear Bars	3/8" Grade 50
Mounting Plate	5/16" A-36 Steel
Cutting Edge	3/4" x 6"
Steps	Laser & formed, welded on back
Struck Capacity cu. ft.	(84" - 30.11) (96" - 34.19) (102" - 36.8) (108" - 39)
Heaped Capacity cu. ft.	(84" = 36.13) (96" - 41.02) (102" - 44.16) (108" - 46.8)
Weights (Lbs.)	84" = 742 lbs, 96" = 809 lbs 102" = 836 lbs, 108" = 898 lbs



Snow Pusher


96" Model # 33017, 120" Model #33021

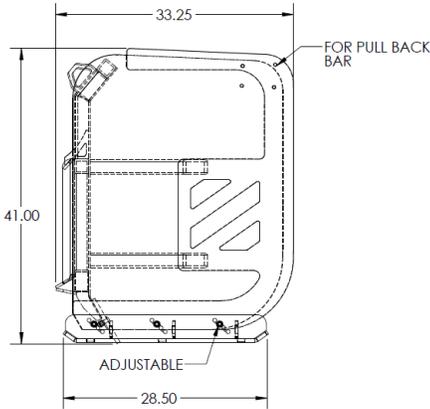



Adjustable & Replaceable Wear Bars

Specifications	
Overall Width	96" & 120"
Overall Height	41"
Overall Depth	33 1/4"
Bucket Thickness	3/16"
Side Plates	3/16"
Side Plate Reinforcement	1/4"
Wear Bars	1/2" with 4 adjustments
Mounting Plate	5/16" HR Steel
Cutting Edge	1/2" x 7" Grade 50 Steel
Weights (Lbs.)	(96" - 737) (120" - 867)

Accessories

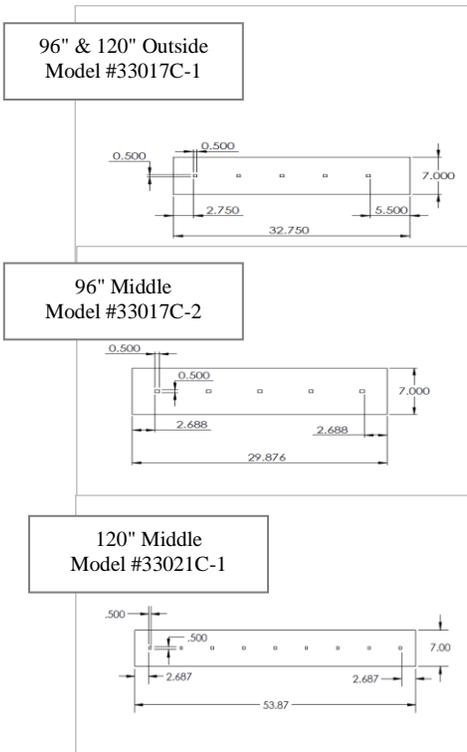


Snow Pusher Accessories		
Model #	Description	Weight
33017-PB	96" Pull Back Bar	182 lbs
33021-PB	120" Pull Back Bar	226 lbs
33017C-1	96" Outside	33 lbs
33017C-1	120" Outside	33 lbs
33017C-2	96" Middle	30 lbs
33021C-1	120" Middle	54 lbs
33017B-LH	Skid Shoe Left	23 lbs
33017B-RH	Skid Shoe Right	23 lbs

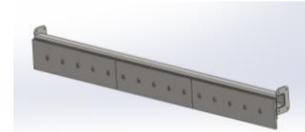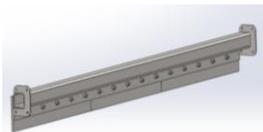

Bale Spears



Receiver Style Bale Spear Model #33016

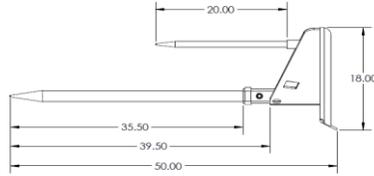

- Replaceable main spear & stabilizing spears

Specifications	
Width	46"
Height	18"
Overall Depth	50"
Main Spear	43" Spear Bolt in Spear, 35½" Useable Length (P#33016-03)
Stabilizer Spear	23" Spear, 20" useable length (P#33016-02)
Max Lift	Total Max Load 1500 lbs
Weight	155 lbs



Single Bale Spear (Econo) Model #33189

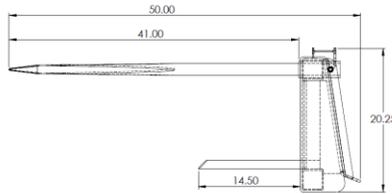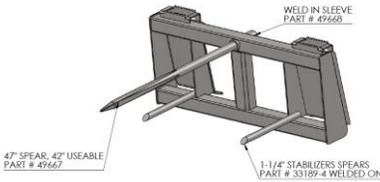

- Economical way to move a single bale

Specifications	
Width	46"
Height	20"
Overall Depth	50"
Spear	47" Spear Bolt in Spear, 42" Useable Length
Sleeve	Weld in Sleeve (P# 49668)
Max Lift	Total Max Load 3000 lbs
Weight	189 lbs

Single Bale Spear Model #33124

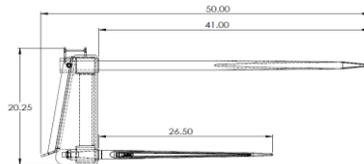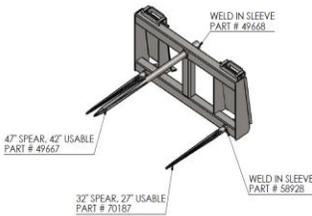


- Single Bale Moving • Durable Construction

Specifications	
Width	46"
Height	20"
Overall Depth	50"
Main Spear	47" Spear Bolt in Spear, 42" Useable Length (P#49667)
Main Sleeve	Weld in Sleeve (P# 49668)
Stabilizer Spear	32" Spear, 27 useable length (P#70187)
Stabilizer Sleeve	Weld on sleeve (P#58928)
Max Lift	Total Max Load 3000 lbs
Weight	189 lbs



Bale Spears



Double Bale Spear Model #33160

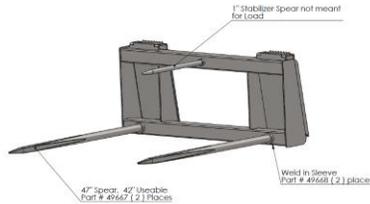

- Bottom lift ability allows for higher lifting

Specifications	
Width	46"
Height	20"
Overall Depth	50"
Width Between Spears	36"
Spear	47" Spear Bolt in Spear, 42" Useable Length (P# 49667)
Sleeve	Weld in Sleeve (P# 49668)
Stabilizer Spear	1" Cold Roll Round 23" Spear, 18½" Useable (P# 33160-7)
Max Lift	Total Max Load 3000 lbs
Weight	190 lbs


Triple Bale Spear Model #33159

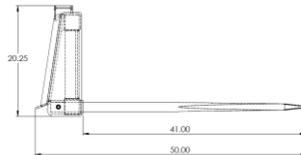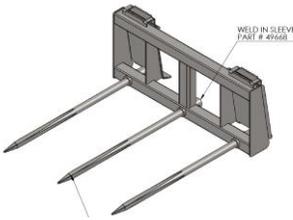

- Best suited for large round or square bales

Specifications	
Width	46"
Height	20"
Overall Depth	50"
Width Between Spears	36"
Spear	47" Spear Bolt in Spear, 42" Useable Length (P# 49667)
Sleeve	Weld in Sleeve (P# 49668)
Max Lift	Total Max Load 3000 lbs
Weight	224 lbs

Double Round Bale Spear Model #33125

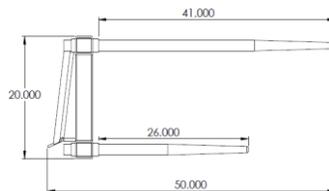

- Double Bale moving saves time

Specifications	
Width	68"
Height	20"
Overall Depth	50"
Width Between Top Spears	60"
Width Between Bottom Spears	42"
Tapered Spears with nut	49" Spear Bolt in Spear, 44" Useable Length (P# 44119) 3500 LB max
Sleeve	Weld in Sleeve (P# 44132)
Tapered Stabilizer Spears with nuts	32" Spear Bolt in Spear, 27" Useable Length (P# 61413) 3500 LB max
Max Lift	Total Max Load 3000 lbs
Weight	325 lbs



Bale Accumulator Grapple

Model #55003-S



Specifications	
Width	84"
Height	26"
Overall Depth	104"
Cylinder	2 x 8 Welded Cross Tube ORB Ports
Bushings	Machined Wear Resistant Nylon
Hooks	65-45-12 Ductile Iron
Frame	Laser Cut and Formed
Hoses	3/8" 3000 psi Hydraulic Hoses Included
Max Lift	8-10 Bales
Weight	998 lbs

-  Hands free haying
-  Grabs and lifts 8-10 square bales at a time
-  Removable sides for ease of grabbing when stacked
-  Reduces labor - One person can gather, lift load and unload
-  Quickly mounts to Skid Steers or Tractors



6 Pack Bale Accumulator Grapple


Model #55004-S



-  Hands free haying
-  Grabs and lifts 6 square bales at a time
-  Removable sides for ease of grabbing when stacked
-  Reduces labor - One person can gather, lift load and unload
-  Quickly mounts to Skid Steers or Tractors


Specifications

Width	84"
Height	26"
Overall Depth	68"
Cylinder	2 x 8 Welded Cross Tube ORB Ports
Bushings	Impact Resistant UHMW
Hooks	65-45-12 Ductile Iron
Frame	Laser Cut and Formed
Hoses	3/8" 3000 psi Hydraulic Hoses Sold Separately
Max Lift	6 Bales
Weight	600 lbs

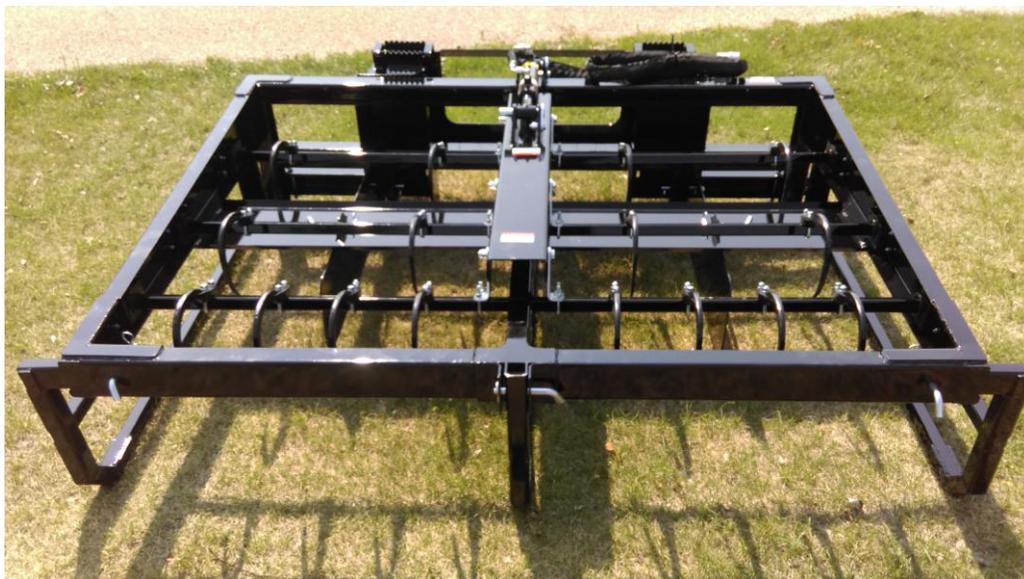

3 Point Trailer Hitch

Model #44001

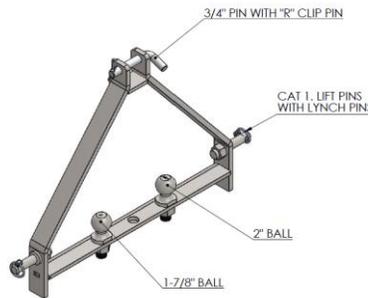


Specifications	
Overall Width	31"
Overall Height	21"
Overall Depth	2½"
Material	Grade 50 Steel
Towing Capacity	8000 lbs
Weight	34 lbs

-  Provides the ability to move trailers without getting off of the tractor
-  Built using laser cut parts
-  Includes (1) 2" ball, (1) 1 7/8" ball, (2) Cat I lift pins and (1) 3/4" pin
-  Heavy duty side lift pins
-  Fits Cat I Hitches

6 ft Slider Ditcher Blade

Model # 44005

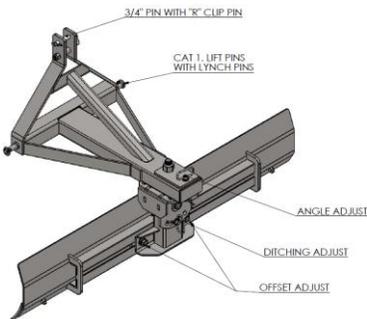


Specifications	
Width	72"
Overall Height	38"
Overall Depth	35"
Material	Grade 50 Steel
Moldboard Size & Thickness	72" x 13" 1/4" A36 Steel
1/2" x 6" Scraper Blade	40 lbs
Recommended HP	25-40
Weight	285 lbs

-  All parts are laser cut, slotted and tabbed to ensure accuracy and minimize variation
-  Slider style blade allows right or left offset up to 16"
-  Five positions forward and reverse
-  Optional ditching blade rotation assembly with settings of 15 and 30
-  3 Point hitch with replaceable Cat I lift arm pins



Toro Dingo Rock Bucket 42" Model #33183

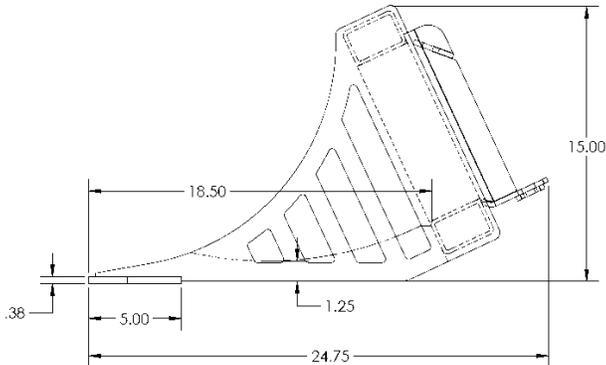


-  Durable construction for years of use
-  Fits any Mini Skid Steer with Toro Dingo style coupler
-  Unique tooth design to hold material in bucket
-  Clears roots and rocks while leaving dirt behind
-  Perfect tool for digging material from demolition jobs
-  Painted using a 2 part Urethane process for an exceptional finish

Specifications


Specifications	
Overall Width	42"
Overall Height	15"
Overall Depth	24 ³ / ₄ "
Inside Depth	18 ¹ / ₂ "
Tines	1/4"
Width between tines	1 ³ / ₄ "
Cutting Edge	3/8" x 5"
Mounting Plate	1/4"
Top Tube & Bottom Tube	2" x 3" x 3/16"
Weights	180 lbs




Mounting Plates

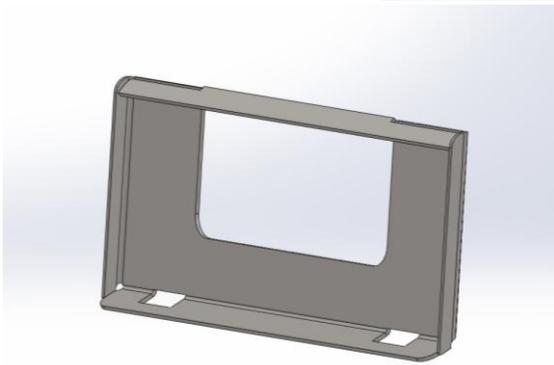


U-Style Model # 33000

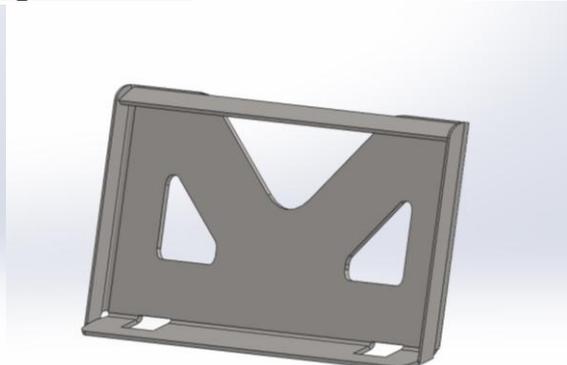

V-Style Model # 33005

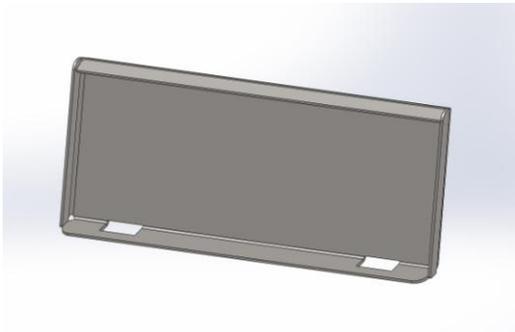

Solid Style Model # 33031

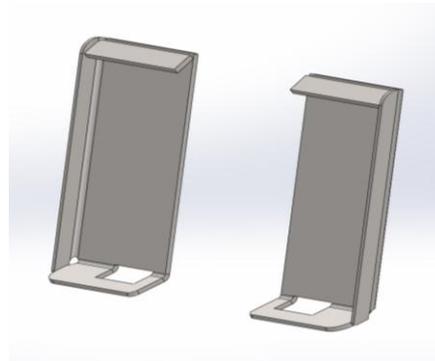

2 Piece Model # 33043


Specifications	
33000 U Style	58 lbs
33005 V Style	74 lbs
33031 Solid	85 lbs
33043 - 2 Piece (L & R)	41 lbs

-  Durable construction for years of use
-  Update old attachments or build your own
-  Fits all loaders and skid steers with universal quick-attach hitches
-  Unpainted for easy welding



Misc. Mounting Plates

**Euro Style Plates
2 piece
Model # 33229**

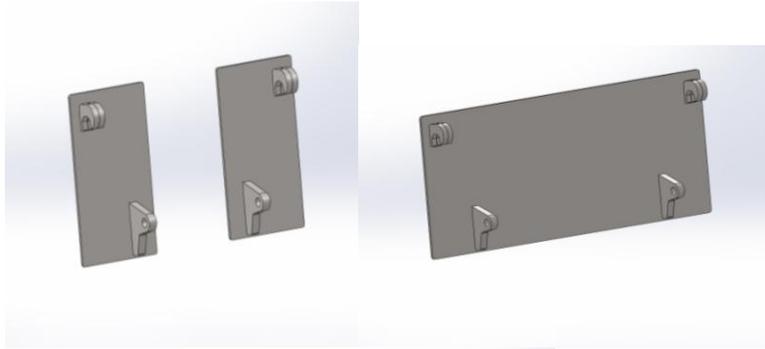

**Euro Style Plate
Model # 33219**



**JD 400/500
Series Kits
(Offset Style)
Model # 33228**

**JD 400/500
Series Kits
(Flat Style)
Model # 33199**

**RC-30 / PT-30
Model # 33130**






Specifications

33229 Euro Style 2 PC	46 lbs
33219 Euro Style	86 lbs
33228 JD Offset Style	40 lbs
33199 JD Flat Style	26 lbs
33130 RC-30/PT0	53 lbs

-  Durable construction for years of use
-  Update old attachments or build your own
-  Fits all loaders and skid steers with universal quick-attach hitches
-  Unpainted for easy welding



3 Point Adapter Model # 33280

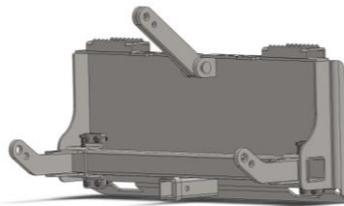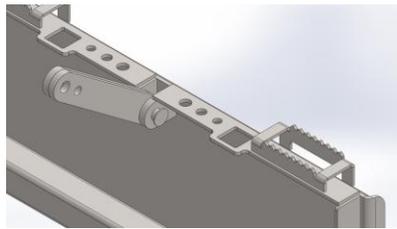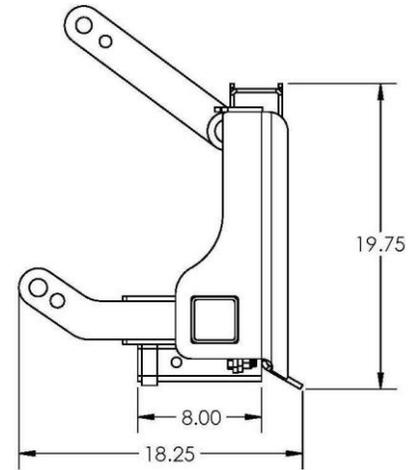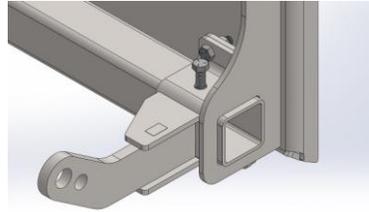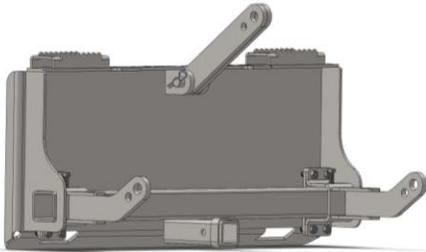

Specifications

Overall Width	18.25"
Overall Height	19.75"
Depth	8"
Mounting Plate	5/16" Grade 50
Tube	3" x 3" x 3/16"
Link Plates	5/8" Grade 50
Weight	175 lbs




FEATURES:

-  Universal Skid Steer Mount with Cat. I and II Adapters plus additional Receiver Hitch
-  Easily adapt 3 Point Tractor Attachments to Skid Steer
-  Durable, dependable and built to last
-  Painted using a 2 part Urethane Process for an exceptional finish



Universal Quick Attach Adapter

Model # 33054

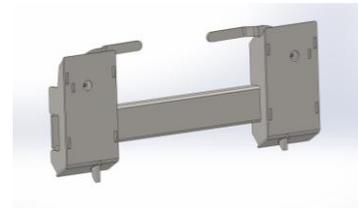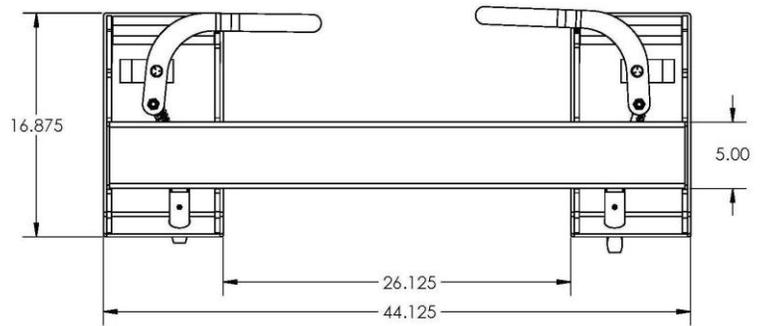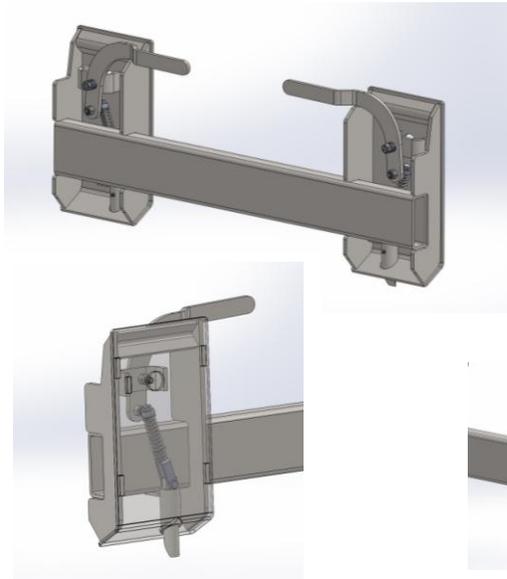

Specifications

Overall Width	44.125"
Overall Height	16.875"
Depth	4"
Bracket Height	16.875"
Bracket Width	9"
Tube	2" x 5" x .250"
Handle	Laser Cut 3/8" Grade 50 Steel
Weight	104 lbs


FEATURES:

-  Easily convert Pin On Style Loaders to Universal Skid Steer Style
-  Greaseable Pin and Bushing
-  Durable, dependable and built to last
-  Slim design keeps attachment close to machine


Note: This item is not painted



Receiver Plate Model #33015

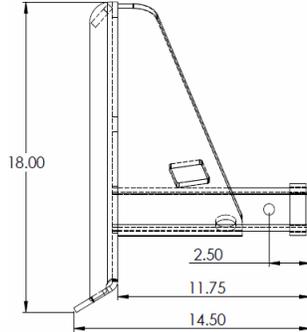

Receiver Plate Specifications	
Width	45.75"
Height	18"
Depth	14"
Mounting Plate	5/16" A-36 Steel
Gusset	5/16" A-36 Steel
Top Bar	3/8" A-36 Steel
Tube	2-1/2" Seamless tube - Accepts a 2" Receiver Tube
Weight	105 Lbs.

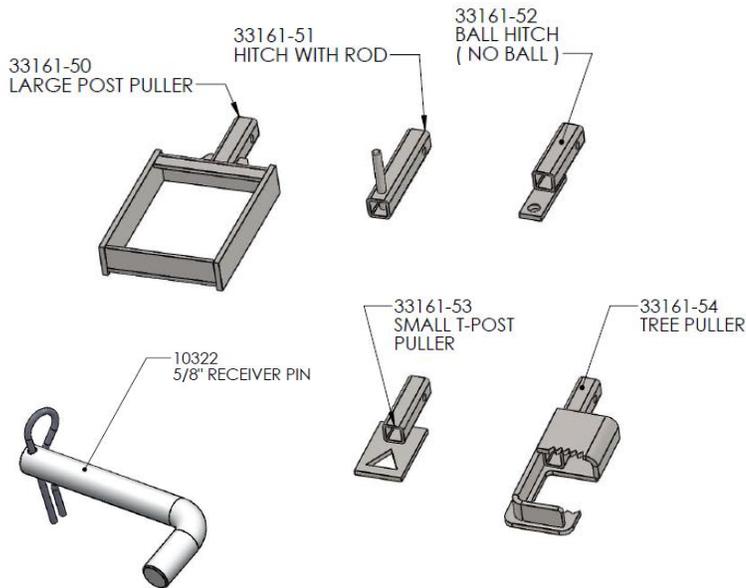

Receiver Plate Accessories		
Model #	Description	Weight
33161-50	Large Post Puller	26 lbs
33161-51	Hitch with Rod	6 lbs
33161-52	Ball Hitch (No Ball)	5 lbs
33161-53	Small T-Post Puller	8 lbs
33161-54	Tree Puller	24 lbs
10322	5/8" Receiver Pin	.75 lbs



-  Receiver Plate mounts to most loader buckets without tools
-  Easily add accessories to Receiver Plate
-  Painted using a 2 part Urethane process for an exceptional finish

Accessories are designed for use with our receiver plate only, 1000 lb lift capacity. Lift limit is determined by Receiver capacity or loader capacity, whichever is less.





Bolt-On Cutting Edge

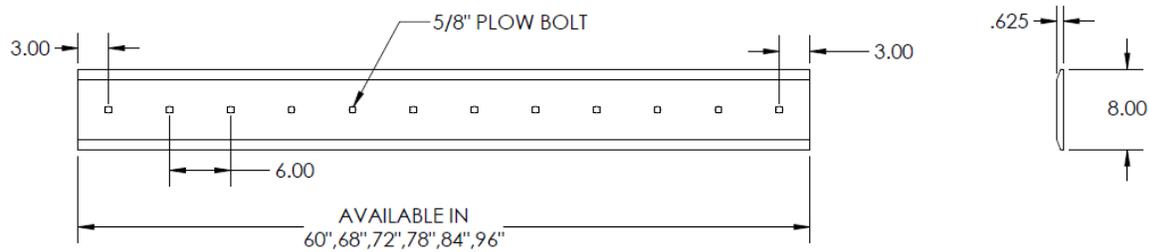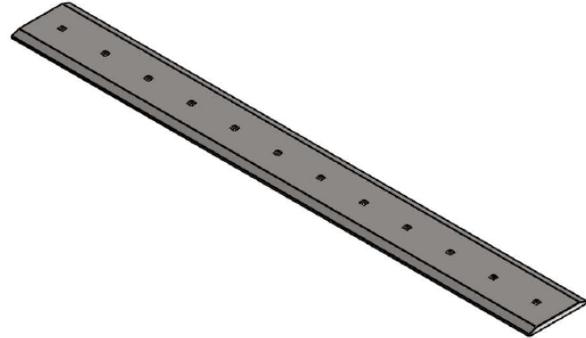

Model	Description	Weight
33193	60" / 10 Hole	80 lbs
33194	68" / 11 Hole	91 lbs
33050	72" / 12 Hole	96 lbs
33201J-07	78" / 13 Hole	105 lbs
33051	84" / 14 Hole	112 lbs
33052	96" / 16 Hole	128 lbs
33230	102" / 17 Hole	136 lbs
33231	108" / 18 Hole	144 lbs



 Durable construction for years of use

 5/8" x 8" Double Bevel Grade 1080



Bolt-On Tooth Bar

60" Model #33208, 68" Model #33209,
72" Model #33039, 78" Model #33210,
80" Model #33211, 84" Model #33164

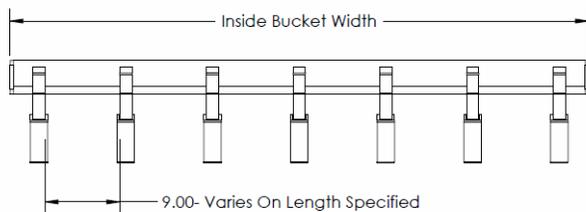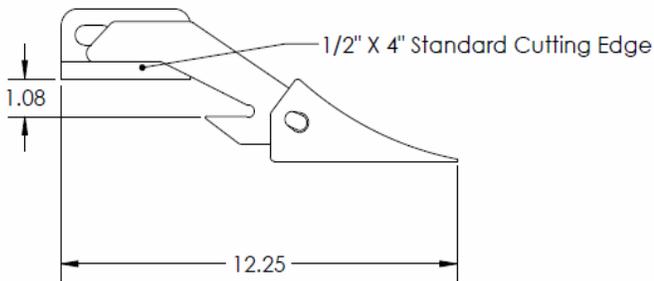

Specifications

Designed for buckets with 3/4" thick Cutting Edge
(Fits all Legend Buckets)

For other Bucket Models -
Specify inside bucket width when ordering

Overall Width	Varies by bucket width
Overall Depth	12 1/4"
Material	Grade 50 Steel
Weight	60" (81 lbs.), 68" (92 lbs.) 72" (97 lbs.), 78" (105 lbs.) 80" (108 lbs.), 84" (114 lbs)

-  Durable construction for years of use
-  Excellent tool for loosening compacted soil or grubbing out rocks
-  Adaptable to most tractor and skid steer loader buckets
-  An economical and convertible alternative to bolt-on or weld-on individual teeth
-  Replacement teeth available



Performance Guarantee

We offer the only true Performance Guarantee in the industry. If your serial numbered attachment fails because of defects in material or workmanship, under normal working conditions in a 12 month period we will replace it at no charge! This warranty does not cover replacement of scheduled service items and high wear items. Warranty does not apply to failure of any attachment used beyond its specified capabilities.

